


Schatten Design

627 Colby Drive Waterloo Ontario Canada N2V1B4
 519-742-3862 fax 519-742-1843 tech@schattendesign.com


Instructions for T-2 Thumbwheel Controls

T-2 thumbwheels come supplied with 24" of 2 conductor mini shielded cable, a .047 mfd capacitor, and 2 pieces of 3M VHB tape for mounting the units. There is a white score line on the back of the circuit board which when deepened sufficiently with a knife, allows the T-2 to be snapped in half and split into two separate units (fig.1).

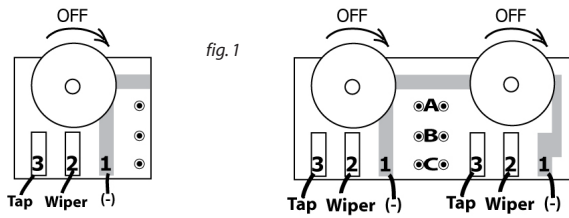

One Volume Control


For use as a single volume control, the hot (+) signal in is soldered to lug 3, the hot (+) signal out to the jack is soldered to the wiper (lug 2), and the grounds (-) from both the pickup and the jack are soldered to lug 1 (fig.2).



T-2 Two Volume Controls

In most wiring situations the hot (+) signal in would be soldered to lug 3 and the hot (+) output soldered to lug 2.


However, in order to allow both volume controls to operate independently, this is reversed in this application. The hot (+) signals in are moved to lugs 2 and the hot (+) signals out are moved to lugs 3. A jumper wire is soldered into the upper pair of holes labeled 'A' to allow for a mono output. (fig 3).

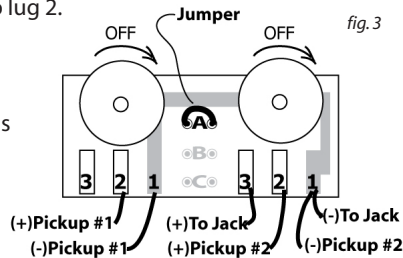

- Notes:** 1) There is a circuit board connection between the two #1 pads.
 2) A tone control will not work properly with a passive (non-preamped) piezo pickup.


T-2 One Volume, One Tone

Fig. 4 shows the wiring for utilizing a T-2 as a volume and tone. The supplied capacitor is soldered into the middle pair of holes labeled 'B'.



T-2 One Volume, One Tone

Fig. 5 shows a diagram of a T-2 with the positions of the volume and the tone thumbwheels reversed as compared to fig. 4. The supplied capacitor is soldered into the lower pair of holes labeled 'C'.

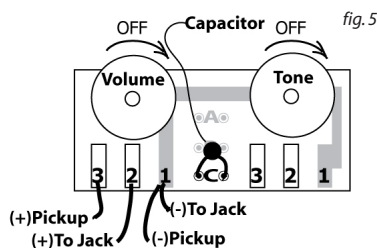


Schatten Design

627 Colby Drive Waterloo Ontario Canada N2V1B4
 519-742-3862 fax 519-742-1843 tech@schattendesign.com


Instructions for T-2 Thumbwheel Controls

T-2 thumbwheels come supplied with 24" of 2 conductor mini shielded cable, a .047 mfd capacitor, and 2 pieces of 3M VHB tape for mounting the units. There is a white score line on the back of the circuit board which when deepened sufficiently with a knife, allows the T-2 to be snapped in half and split into two separate units (fig.1).

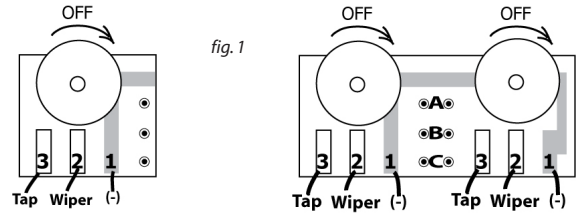

One Volume Control


For use as a single volume control, the hot (+) signal in is soldered to lug 3, the hot (+) signal out to the jack is soldered to the wiper (lug 2), and the grounds (-) from both the pickup and the jack are soldered to lug 1 (fig.2).



T-2 Two Volume Controls

In most wiring situations the hot (+) signal in would be soldered to lug 3 and the hot (+) output soldered to lug 2.


However, in order to allow both volume controls to operate independently, this is reversed in this application. The hot (+) signals in are moved to lugs 2 and the hot (+) signals out are moved to lugs 3. A jumper wire is soldered into the upper pair of holes labeled 'A' to allow for a mono output. (fig 3).

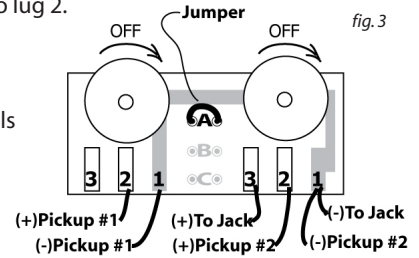

- Notes:** 1) There is a circuit board connection between the two #1 pads.
 2) A tone control will not work properly with a passive (non-preamped) piezo pickup.

T-2 One Volume, One Tone

Fig. 4 shows the wiring for utilizing a T-2 as a volume and tone. The supplied capacitor is soldered into the middle pair of holes labeled 'B'.

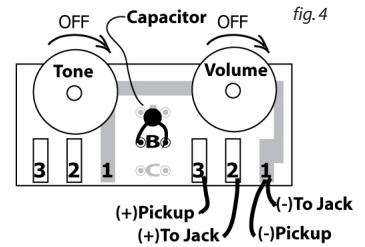

T-2 One Volume, One Tone

Fig. 5 shows a diagram of a T-2 with the positions of the volume and the tone thumbwheels reversed as compared to fig. 4. The supplied capacitor is soldered into the lower pair of holes labeled 'C'.

